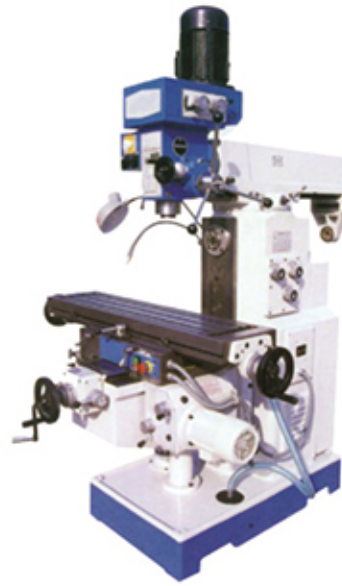


DRILLING MACHINE

DRILLING & MILLING MACHINE


DM7550C

DM6350A

Main spindle protection (Optional)

DM50C

New Panel is Optional
DM6350G

DM6350Z

| Specification | DM50C | DM7550CW | DM 7550C | DM 6350A | DM6350G | DM6350Z/DM6350ZA |
|-----------------------------------|-----------------|----------------|----------------|-----------------|-----------------|------------------|
| Max. drilling dia. | 30mm | 30mm | 30mm | 30mm | 30mm | 30mm |
| Max. horizontal milling width | 100mm | 100mm | 100mm | 100mm | 100mm | 125mm |
| Max. vertical milling dia. | 25mm | 25mm | 25mm | 25mm | 25mm | 25mm |
| Max. tapping dia. | M16 | M16 | M16 | M16 | M16 | M16 |
| Distance spindle to table surface | 50-410mm | 60-390mm | 70-420mm | 100-400mm | 100-400mm | 100-400mm |
| Spindle speed range | Vertical | 115-1750rpm | 115-1750rpm | 115-1750rpm | 90-2000rpm | 90-2000rpm |
| | Cross | | 60-1350rpm | | 38-1310rpm | 38-1310rpm |
| Spindle travel | 120mm | 120mm | 120mm | 120mm | 120mm | 120mm |
| Table size | 800x240mm | 800x240mm | 800x240mm | 1120x260mm | 1120x260mm | 1120x260mm |
| Table travel | 400x215mm | 400x230mm | 400x230mm | 600x300mm | 600x270mm | 600x270mm |
| Motor | 0.85/1.5kw | 0.85/1.5/2.2kw | 0.85/1.5kw | 0.85/1.5V/2.2kw | 0.85/1.5V/2.2kw | 2.2kw |
| Overall dimensions (mm) | 1270x950x1800mm | 1290x1220x2100 | 1110x1100x2080 | 1655x1450x2150 | 1580x1330x2250 | 1520x1285x2150 |
| N.W / G.W (kg) | 500kg | 970/1120 | 610/770 | 1500/1600 | 1350/1500 | 1350 /1500 |

DM6350A: Table feed in X, Y direction through gear drive, Hardened and ground table surface.

DM6350Z: Automatic spindle feed.